


Garant

Slotted reducing adapter with cooling, Ø 20 mm, Clamping range Ø D1: 10mm

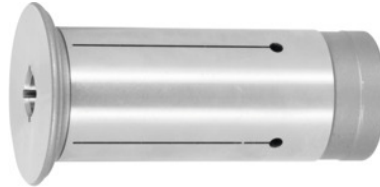

Order data

Order number	302155 10
GTIN	4045197732682
Item class	31G

Description

Version:

With cooling channel slots.

Application:

- For drilling, reaming, milling, and tool sharpening.
- Very high flexibility due to reduction in clamping diameter.
- Very high torque guarantees a higher volume of metal removal compared to direct clamping.
- Concentricity $\pm 5 \mu\text{m}$ (system accuracy at $3 \times D$).
- Concentricity $\pm 2 \mu\text{m}$ (for reducing adapter).
- Can be used in all commercially available hydraulic clamping chucks.

Suitable for:

Hydraulic clamping chuck **with clamping Ø 20 mm.**

Ø D: 20 mm

Technical description

Clamping Ø D ₁	10 mm
Ø D	20 mm
External Ø	20 mm
Product name attribute	Ø 20 mm

Concentricity system	5 μ m
Type of product	Reducing adapter