


## Groove width gauge with intermediate sizes and ISO fits, Type: A

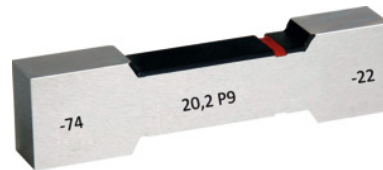

### Order data

Order number	484409 A
GTIN	2050002070943
Item class	48B

### Description

#### IMPORTANT: item is configurable

Nominal size: 3.001 - 5.999 mm, Intervall: 0,001

Tolerance zone: A; B; C; CD; D; E; EF; F; FG; FG; G; H; J; JS; K; M; N; P; R; S; T; U; V; Z; ZA; ZB; ZC; ZC

Quality: 10; 11; 12; 13; 7; 8; 9

#### Version:

Groove width gauges with "Go" and "No Go" end. "Go" end with **wear allowance** to DIN 7164.

Gauge body of hardened steel.

For intermediate sizes or numerical tolerances.

Groove width gauge with intermediate sizes and ISO fits, e.g. No. 484409 size **15.8 M6**.

#### Application:

For checking flat fits, e. g. grooves.

#### Standard:

Toleranzen und Abmaße nach **DIN EN ISO 1938-1 und DIN 7164**.

#### Note:

The size designation type describes the nominal dimension in millimetres (mm).

Type A = 3.001 – 5.999

Type B = 6.001 – 8.999

Type C = 9.001 – 12.999

Type D = 13.001 – 16.999

Type E = 17.001 – 20.999

Type F = 21.001 – 25.999

Calibration: L6

Nominal size: 3.001 - 5.999 mm

### Technical description

Nominal size	3.001 - 5.999 mm
Tolerance zone	C
Tolerance zone	Z
Tolerance zone	ZB
Tolerance zone	P
Tolerance zone	M
Tolerance zone	FG
Tolerance zone	U
Tolerance zone	EF
Tolerance zone	H
Tolerance zone	CD
Tolerance zone	F
Tolerance zone	D
Tolerance zone	B
Tolerance zone	G
Tolerance zone	S
Tolerance zone	V
Tolerance zone	ZC
Tolerance zone	A
Tolerance zone	T
Tolerance zone	E
Tolerance zone	R
Tolerance zone	FG
Tolerance zone	ZC
Tolerance zone	K
Tolerance zone	JS
Tolerance zone	ZA
Tolerance zone	J
Tolerance zone	N

Quality	10
Quality	11
Quality	12
Quality	7
Quality	9
Quality	8
Quality	13
Standard	DIN EN ISO 1938-1
Standard	DIN 7164
Calibration	L6
Type of product	Shaft slot gauge

## Services

DAkkS calibration "Go" / "No Go" plug gauge maximum Ø 60 mm	019620 60
Labelling laser-etched Type	018940
Calibration "Go" / "No Go" plug gauge maximum Ø 20 mm	018400 20
Calibration "Go" / "No Go" plug gauge maximum Ø 20 mm	028300 20
DAkkS calibration "Go" / "No Go" plug gauge maximum Ø 60 mm	028340 60